

8

7

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A



A

-C-
 ▽ .002IN/IN
 ▽ .002IN/IN
 -D-

6.250 REF.
 .125 REF.
 BEFORE MACHINING
 .095±.007
 AFTER MACHINING
 2.000 REF.
 1.000 REF.
 2.250
 AFTER MACHINING
 2.312 REF.
 BEFORE MACHINING

1.200
 .600
 -A-

5.50±.020
 2.250
 4.50
 2.750
 .100
 .979
 1.959
 .200 TYP.
 -B-
 φ.100 THRU
 12X
 φ.156 THRU
 2X
 φ.190 THRU
 4X
 .950
 1.90

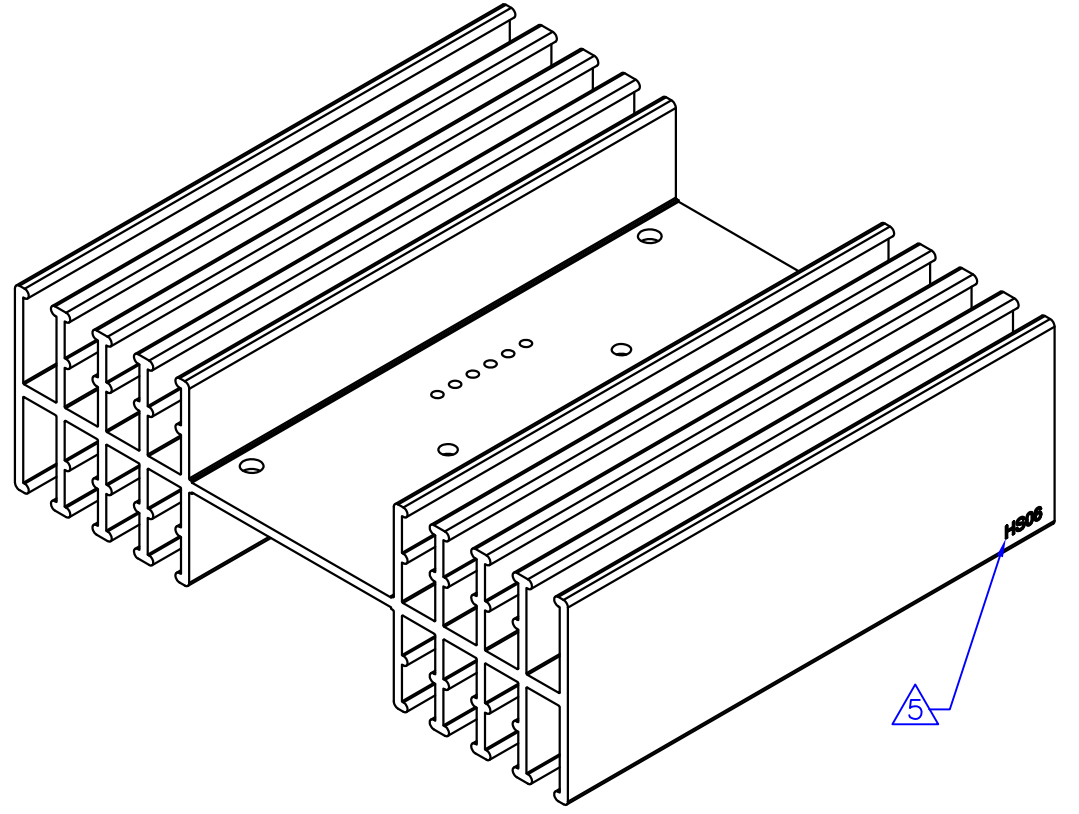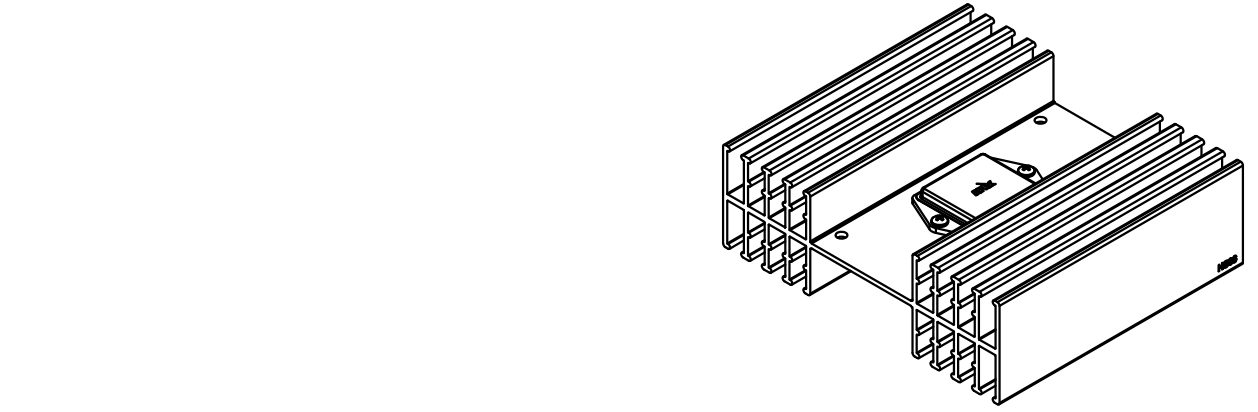

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: 6063-T5 aluminum (AAVID Thermalloy extrusion 60315)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
 Typical breakdown voltage > 300V
5. Mark Part Number with contrasting ink as shown.
6. Approximate Weight: 24.2 oz [686g]

TOLERANCES - UNLESS OTHERWISE SPECIFIED .XX = ±.01 .XXX = ±.005 ANG. = ±.5°				HEATSINK, PDIP SUBJECT: MECHANICAL DRAWING		PART NO. HS06	
DATE: D-M	DESIGNER: P.ECK	DRAWING NO: 80026	SHEET NO: 1	TOTAL SHEETS: 1	FILENAME: HS06	REV: H	DATE: 31JAN08

8

7

6

5

4

3

2

1