

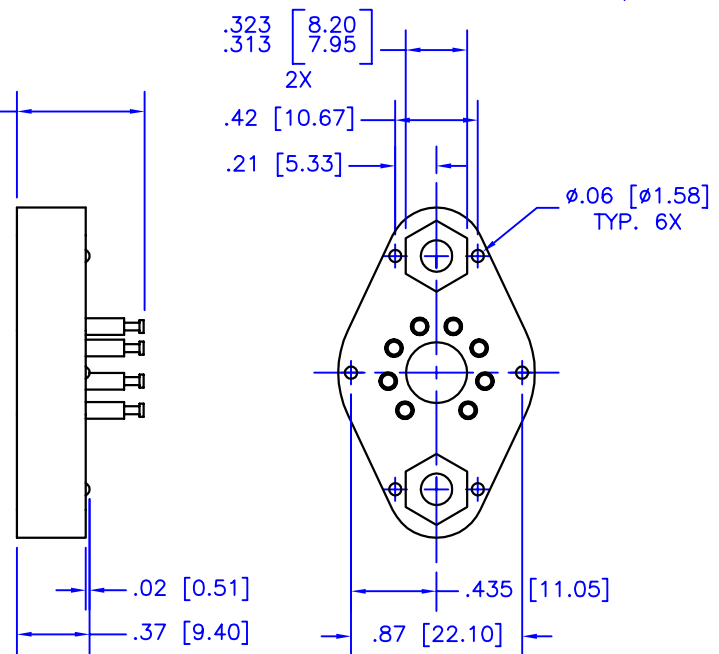
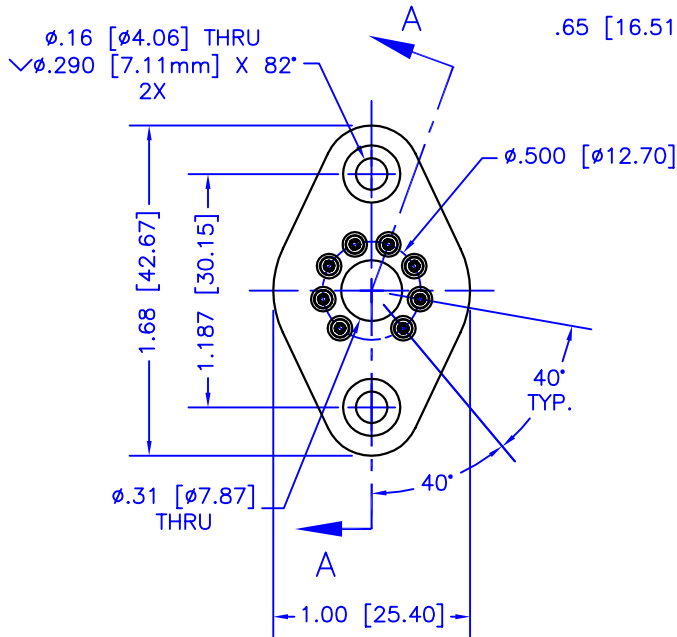
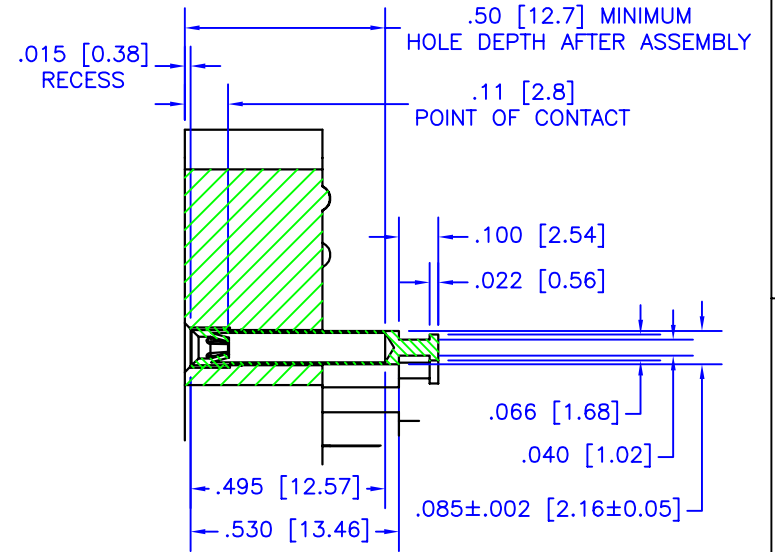


NOTES:

1. Dimensions are in inches & [mm].
2. Socket body: Glass-filled polyester, 94 VO rating, green in color
3. Receptacle shell: 360 brass, with 200 μin tin over 100 μin nickel
4. Receptacle contacts: Beryllium copper with 30 μin gold over 50 μin nickel
5. The continuous temperature rating of the socket shall be 150° C.
6. Contact resistance: 20 milliohms or less.



DETAIL A
SCALE 2:1

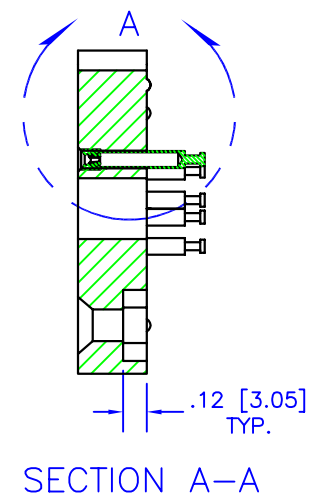

TOLERANCES - UNLESS OTHERWISE SPECIFIED

.XX	= ±.01 [.254]
.XXX	= ±.005 [.127]
ANG.	= ±1°



TITLE TO3 PACKAGE SOCKET				PACKAGE MS03	
SUBJECT MECHANICAL DRAWING					
ENG. D-M	TECH/DRAW. D-M	DCA 50038	SHEET 1 OF 1	FILENAME MS03-E	REV E
				DATE 01/28/05	