

4

3

2




1

D

D

C

C

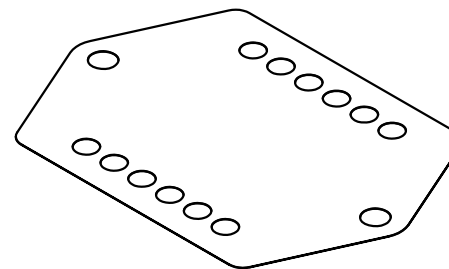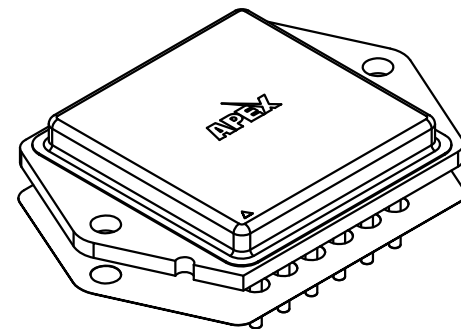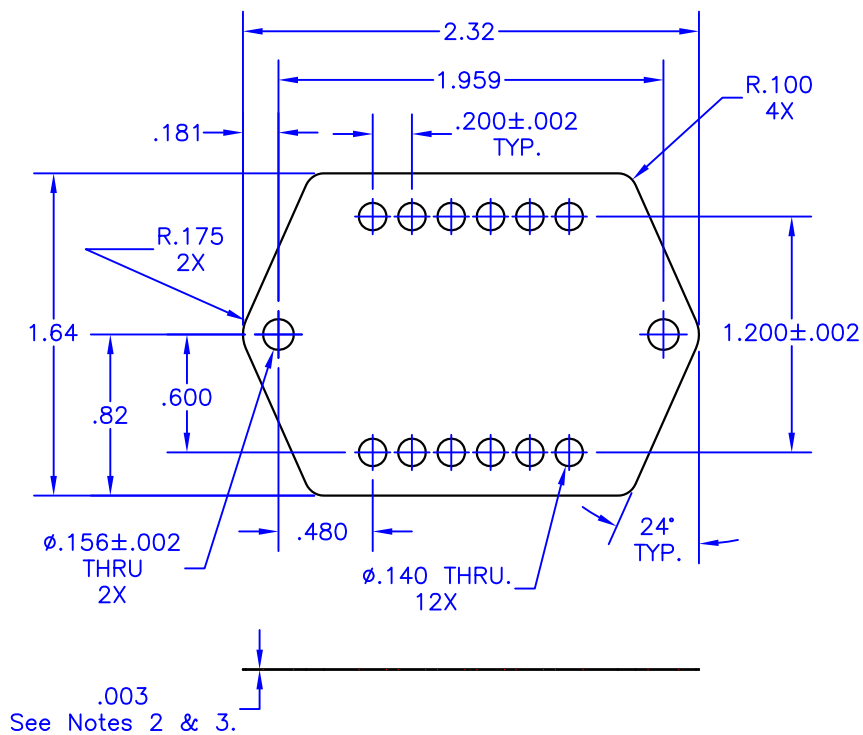

B

B

NOTES:

- Unless otherwise noted, all dimensions are in inches.
- Foil Material: .002 thick 1145 aluminum
- Interface Material: .0005 thick phase-change thermal compound, both sides.
 Maximum shipping & storage temperature – 40°C
 Reflow temperature – 60°C
 Maximum recommended service temperature – 200°C
- Thermal impedance: .030 °C-in/W (.194 °C-cm/W) @ 20psi
- Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
- Used with Power DIP packages (Apex designators: CR, CU, DC & DD).
- Power Devices part no. AL-232-164-APX
- Box part number is G760 (2 7/8" x 2" x 1/4") – Gary Plastics.

A

A

TOLERANCES – UNLESS OTHERWISE SPECIFIED	
.XX	= ±.01
.XXX	= ±.005
ANG.	= ±.5°



TITLE THERMAL WASHER, PDIP				PART NO. TW05	
SUBJECT MECHANICAL DRAWING					
ENG. D-M	TECH/DWN. P.ECK	DCA 80339	SHL OF 1 1	FILENAME TW05	REV DATE E 03NOV08

4

3

2

1